

# STABILA®



How true pro's measure



World's first  
MOTION CONTROL



MOTIONCONTROL

## LAR 350 rotation laser:

Tough DUAL SLOPE laser kit – Made in Germany

# LAR 350 rotating laser with MOTION CONTROL: Welcome to the new age of laser control



The RC-LAR350 remote control with MOTION CONTROL: intuitive control of all laser functions in no time at all

The new LAR 350 rotation laser incorporates many groundbreaking technologies. Its revolutionary features make every measuring task easier, quicker, more effective and even more reliable. The most important innovations for increasing your productivity:

**1. MOTION CONTROL:** An intuitive remote control with in-built movement sensor. By turning the remote control to the right or left, the movement sensor accelerates or decelerates the chosen laser function. This enables you to intuitively control numerous functions and settings at a measuring range of up to 60 ft.

**2. LED ASSIST system:** The LEDs integrated into the laser housing light up to indicate various functions. The system helps you to monitor the LAR 350 from a distance. This prevents you from having to constantly carry out checks at the site of the laser, saving you time in your day-to-day work.

**3. MASKING MODE:** The rotating laser beam can be limited to a particular area. This prevents the beam from interfering with other lasers causing them to malfunction, or visually disturb other professionals working on site. Multiple lasers can now work on different tasks simultaneously and without hindrance.

# For serious professionals: DUAL SLOPE laser for all measuring tasks

- 1) Laser beam (up)
- 2) Rotation head
- 3) On / off / tilt and manual mode
- 4) LED ASSIST system
- 5) Locator markings
- 6) Markings for plumb line (downwards)
- 7) Remote control
- 8) STABILA PROTECTOR system
- 9) 5/8" tripod connection thread

Made in Germany



**CAUTION LASER RADIATION**  
DO NOT STARE INTO BEAM  
850nm - 660nm / <1 mW  
CLASS II LASER PRODUCT  
CFR 1040.30 AND 1040.11 CFR

Laser class 2 lasers are not regarded as dangerous in the event of accidental, short-term exposure to the laser beam (exposure time < 0.25 seconds).

## Horizontal position

The laser beam rotates horizontally through 360° around its vertical axis.



## Vertical position

The laser beam rotates vertically through 360° around its horizontal axis.



STABILA 

**Ideal for applications where accuracy and speed are a necessity**

**Application example:  
Parking level designed with slopes for drainage.**



**MOTIONCONTROL**

**The first laser with  
MOTION CONTROL**

Innovative MOTION CONTROL – quick, reliable and convenient laser operation by rotating the remote control. The in-built sensor detects hand movements and transmits them using infrared technology up to a distance of 60 ft.

Adjustment of slope as shown in the application example can be carried out easily and without increments. Further setting options for the new MOTION CONTROL remote control include rotation speed, size and position of the scanning area when using the line function, or size and position of the actively rotating laser in MASKING MODE.

## LED ASSIST system: For visually monitoring the laser from a distance

New LED ASSIST system for easy operation and safety in the workplace. When positioning the laser, integrated LEDs emit a warning when the laser is outside of the leveling range. When using the slope function, the LEDs indicate which axis is currently tilted or is being tilted. When tilt mode is active, flashing LEDs indicate inadvertent shocks and vibrations. Additional indicator lights provide information on the battery and temperature status.



LED ASSIST system with indicators




## Extremely versatile – the right laser function for each application

### The range of functions:


- Tilt function
- MASKING MODE
- Standby mode
- Horizontal and vertical rotation function
- X and Y-axis inclination function (DUAL SLOPE)
- Manual operation
- Line function in scan mode
- Plumb line
- 90° angle

### MANUAL ALIGNMENT

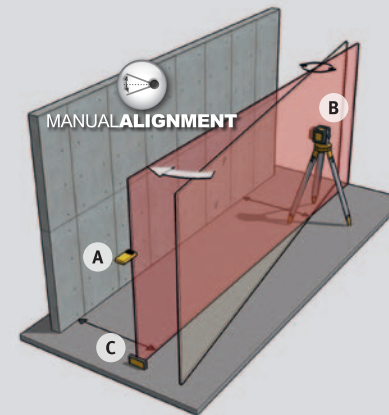


Using the remote control (A), the LAR 350 laser (B) is moved accurately to the REC 300 Digital target point (C).

### Vertical inclination of the laser axis

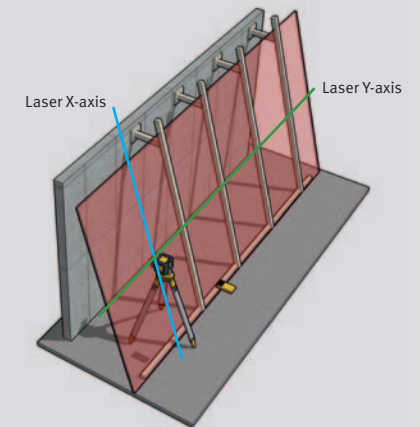

For vertical leveling and marking tasks. The vertical leveling plane can be tilted by up to 5°.


### MASKING MODE

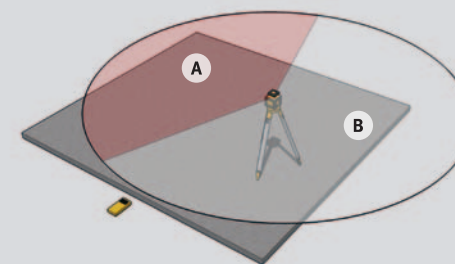

Working area which can be limited as required in rotation mode. The laser beam is only emitted in the defined area A – no interference when using multiple rotation lasers at the construction site and no danger of inadvertent interference by third parties.

(A) Laser active (B) Laser inactive

### DUAL SLOPE inclination function

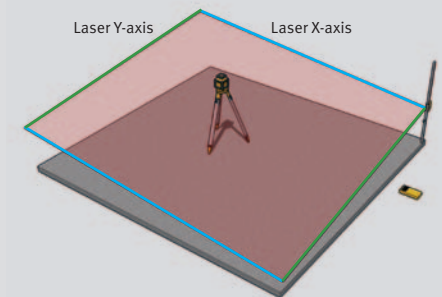

Controlled inclination setting – the leveling plane can be tilted by up to 5° on two axes by remote control.

Nothing gets in the way of this laser – not even falls, rain or dust.



**STABILA PROTECTOR system**

Extremely tough thanks to the STABILA PROTECTOR system that is patented in many countries – perfect protection, even when the laser is dropped from a height of up to 6 ft\*. Set it up again, switch it on and continue measuring with the same precision.

**STABILA rain and dust protection**

Waterproof and dustproof in accordance with protection class IP 65. Optimum protection for use on construction sites, even in poor weather conditions. The laser can be hosed down and cleaned.

Impact protection from a  
max. height of **6 ft**

\* Tested with the tripod falling onto a surface typically found at a construction site


The LAR 350 combined with the REC 300 Digital receiver – because precision and speed are the crucial factors over large distances.



Application example:  
Checking grade.



Working area of the receiver: up to  $\varnothing$  2,600 ft



Number display for reference deviation.

You can determine the deviation from the reference height directly as a number in millimeters, fractions or inches from the receiver display. This enables you to correct strut settings and the height of concrete much more quickly and precisely, for example.

### The perfect combination of precision and measuring range

- Highly precise rotation laser – leveling accuracy of  $\pm 1/8''$  @ 100'.
- The optimum calibration of LAR 350 and REC 300 Digital enables a working area of up to  $\varnothing$  2,600 ft.

### REC 300 Digital receiver

- 1) Acoustic signal emitter
- 2) Graded distance symbols
- 3) Accuracy level selector
- 4) Number display for reference deviation
- 5) Accuracy level display
- 6) 3" high laser reception window
- 7) Volume selector
- 8) Unit selector



Extremely practical – the second display on the rear.



REC 300 Digital: Waterproof and dustproof in accordance with IP 67.



## Increase productivity and efficiency in every construction phase

**Self-Leveling / DUAL SLOPE rotating laser.**  
One laser that does it all: horizontal, vertical. DUAL SLOPE, 90° squaring.

### **Exterior:**

- Grading / Leveling / Drainage site preparation
- Excavation / sewer work
- Concrete / Foundations / Flat work / Ramp work
- Landscaping / Pavers / Fences / Retaining walls

### **Residential / Commercial Construction:**

- Layout and squaring
- Leveling floors
- Ceilings / Soffits
- Vertical framing of walls
- Exterior siding / Brick and stone work

**Application example:**  
Establishing elevations.

**Application example:**  
Setting grade.





## STABILA, INC

332 Industrial Drive,  
South Elgin, IL 60177

☎ 800-869-7460  
📠 847-488-0051  
✉ [custservice@stabila.com](mailto:custservice@stabila.com)

[www.stabila.com](http://www.stabila.com)

## Scope of delivery



### LAR 350, 7-piece set

LAR 350 rotation laser, REC 300 Digital receiver, RC-LAR350 remote control, 90° angle rail, laser goggles, target plate, carrying case, 2 x D 1.5 V batteries, 4 x AA batteries

Cat. # 05700

## Optional accessories



### AE-LAR350 Li-ion rechargeable battery unit

Li-ion rechargeable battery, mains adapter, 4 country-specific interchangeable adapters

Cat. # 07150

## Technical data



Horizontal rotation (scan), plumb line



Vertical rotation (scan), 90° angle



Inclined rotation ± 5° (scan)

Laser class	2
Output	< 1 mW
Laser wavelength	635 nm
Self-leveling range	± 5°
Inclination	± 5°
Leveling accuracy (horizontal and vertical)	± 1/8" @ 100'
Measuring range of visible line	60 ft
Diameter of working area for set receiver	Ø 2,600 ft
Operating life	approx. 80 hours
Batteries included	2 x D
Protection class	IP 65



See all products at  
[www.stabila.com](http://www.stabila.com)



[www.youtube.com/  
StabilaUSA](http://www.youtube.com/StabilaUSA)



[www.facebook.com/  
StabilaUSACanada](http://www.facebook.com/StabilaUSACanada)



Our technical support team will assist you with all questions relating to product selection and use. Phone 800-869-7460. You can of course also e-mail us at [info@stabila.com](mailto:info@stabila.com).